




MAXIMA

PERFORMANCE SERIES

Tonnage: 950

Frame Sizes:
10100, 16000

TECHNICAL SPECIFICATIONS

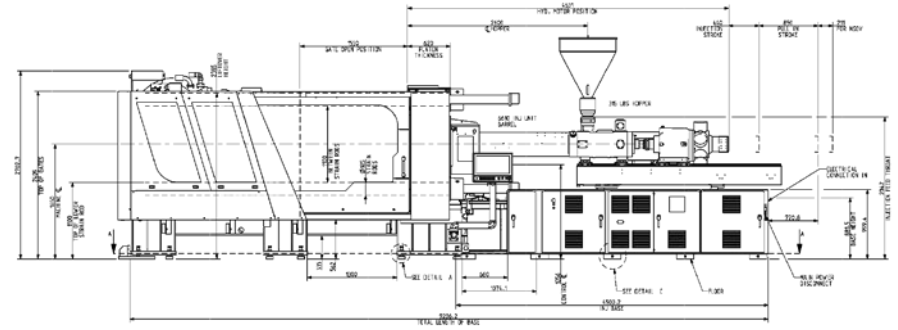

	ENGLISH METRIC	10100 Frame			16000 Frame	
		A'	A	B	A	B
General						
Electrical Motor	hp kW	40 (54 HP) / 80 (107 HP) / 40 (54 HP) 40 (19 kW) / 80 (43 kW) / 40 (19 kW)			40 (54 HP) / 80 (107 HP) / 80 (107 HP) 40 (19 kW) / 80 (43 kW) / 80 (43 kW)	
Total Oil Capacity	gal L	240 908.5			300 1,136	
Water Supply (29°C Inlet Temp)	gal/min L/min	25 95			25 95	
Connected Load	FLI	249			*	
Overall Dimensions (L x W x H)	in mm	402.8 x 123.4 x 107.5 10,230 x 3,133 x 2,731.6			420.5 x 123.4 x 107.5 10,680 x 3,133 x 2,731.6	
Machine Weight (without oil)	lbs kg	98,617 44,732			108,328 49,137	
Injection Unit Specifications						
Injection Capacity, Maximum GPPS	oz gms	148 4,185	179 5,064	231 6,539	288 8,174	362 10,253
Theoretical Displacement	in ³ cm ³	268.3 4,398	324.7 5,321	419.3 6,872	524.2 8,590	657.5 10,775
Maximum Injection Pressure	psi bar	33,200 2,290	27,400 1,890	21,200 1,462	27,400 1,890	21,900 1,510
Injection Rate	in ³ /sec cm ³ /sec	40.7 667	49.2 807	63.6 1,042	61.5 1,008	77.1 1,264
Injection Velocity	in/sec mm/sec	3.28 83.19			3.17 80.60	
Screw Stroke	in mm	22.0 560			27.6 700	
Back Pressure Limits	psi bar	500			500	
Low Torque Screw Speed Maximum	rpm	170	170	162	100	100
Low Torque at Screw	in-lb Nm	74,087 8,371			158,175 17,871	
at bar	psi bar	2,450 169			2,450 169	
Plasticizing Rate (GPPS)	oz/sec gm/sec	4.8 137	6.1 172	8.2 234	5.0 143	6.8 192
High Torque Screw Speed Maximum	rpm	110	110	110	**	**
High Torque at Screw	in-lb Nm	114,834 12,974			**	
at bar	psi bar	2,450 169			**	
Plasticizing Rate (GPPS)	oz/sec gm/sec	3.1 89	3.9 112	5.6 158	**	**

Notes
 1) All machine dimensions and specifications are subject to change. Values are for reference only. All general assembly drawings or visuals included herein are for reference only. Please consult the general assembly drawing from a Milacron representative.
 2) * Consult Factory for additional details.
 3) ** 16000 Injection Unit - Standard single displacement extruder motor

©2017 Milacron LLC. All Rights Reserved.
 Pub Number: T4.1059.A.11.17

4165 Half Acre Rd.,
 Batavia OH 45103
 513.536.2000
 info@milacron.com
 www.milacron.com

		10100 Frame			16000 Frame	
	ENGLISH METRIC	A'	A	B	A	B
Injection Unit Specifications (continued)						
Screw Diameter	in mm	3.94 100	4.33 110	4.92 125	4.92 125	5.51 140
Screw L/D Ratio	L/D	23.9	21.7	19	21.3	19
Number of Pyrometers (Barrel/Nozzle)	qty	4/1			4/1	
Total Heat Capacity	kW	61.3			61.3	
Clamp						
Clamping Force	ton kN	955 8,500			955 8,500	
Opening Force	ton kN	38 340			38 340	
Clamp Stroke	in mm	63 1,600			63 1,600	
Clamp Close Velocity	in/sec mm/sec	43.00 1,092.14			43.00 1,092.14	
Clamp Open Velocity	in/sec mm/sec	44.75 1,136.71			44.75 1,136.71	
Eject Force (forward)	tons kN	20.2 180			20.2 180	
Eject Velocity (forward)	in/sec mm/sec	7.66 194.68			7.66 194.68	
Eject Velocity (retract)	in/sec mm/sec	11.17 283.63			11.17 283.63	
Ejector Stroke	in mm	9.84 250			9.84 250	
Mold Protect Pressure	psi	1,500			1,500	
Maximum Daylight	in mm	82.7 2,100			82.7 2,100	
Extended Daylight (Option)	in mm	94.4 2,400			94.4 2,400	
Minimum Mold Height	in mm	19.7 500			19.7 500	
Maximum Mold Height	in mm	43.3 1,100			43.3 1,100	
Maximum Mold Weight	lbs kg	36,290 16,460			36,290 16,460	
Platen Size (H x V)	in mm	72.8 x 61.4 1,850 x 1,560			72.8 x 61.4 1,850 x 1,560	
Distance Between Tie Rods	in mm	54.7 x 43.3 1,390 x 1,100			54.7 x 43.3 1,390 x 1,100	
Tie Rod Diameter	in mm	7.28 185			7.28 185	
Eject and CP	g/min l/min	40 / 21 151 / 79			40 / 21 151 / 79	
Dry Cycle Time (Euromap 6)	sec	4.15 w/o eject-on-the-fly			4.15 w/o eject-on-the-fly	
Diagonal Tiebar Distance	in mm	73 1,848			73 1,848	
Rotary Turn Table Recommended		Varian 1600 mm			Varian 1600 mm	



MAXIMA

PERFORMANCE SERIES

Tonnage: 950

**Frame Sizes:
10100, 16000**

TECHNICAL SPECIFICATIONS

©2017 Milacron LLC. All Rights Reserved.
Pub Number: T4.1059.A.11.17

4165 Half Acre Rd.,
Batavia OH 45103
513.536.2000
info@milacron.com
www.milacron.com