



THE OMEGA SERVO



550-910 TON



MILACRON®

THE OMEGA SERVO

LARGE RAM DIAMETER & UNIQUE PREFILL CYLINDER DESIGN

- Provides Uniform Force Distribution across Platen
- Provides Excellent Mold Squareness & Parallelism
- Reduces Mold Wear
- Fast Tonnage Built-up Time

GENEROUS MOLD SPACE


- Accommodates Large Molds

CLOSED LOOP PID TEMPERATURE CONTROL

- Provides precise Temperature Control
- Excellent Process Control & Stability

TWIN CYLINDER INJECTION UNIT

- Uniform Load Distribution across Screw Centerline

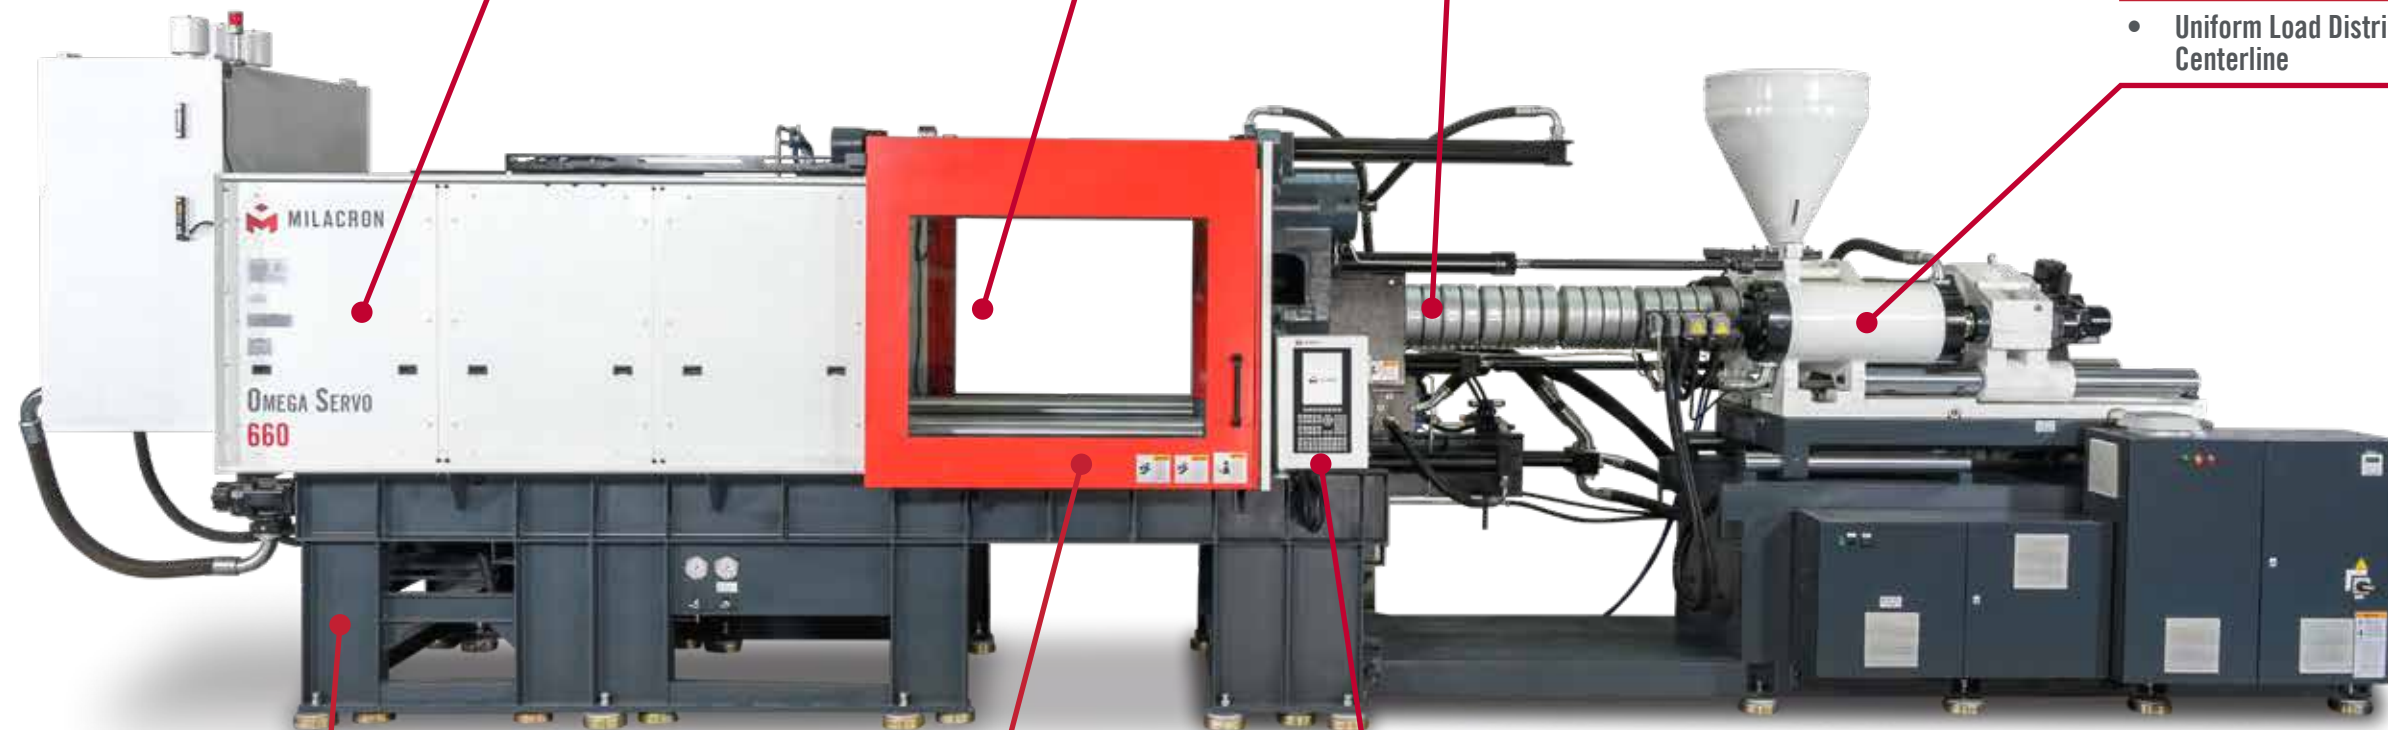

SERVO MOTOR

- Outstanding Energy Saving
- Faster Response towards Hydraulic System
- Excellent Shot Weight Consistency
- Reduced Noise Level

WIDE SKATES FOR PLATEN SUPPORTS

- Reduced Platen Deflection
- Enhanced Life of Tie-bars
- Higher Mold Carrying Capacity
- No Need of Frequent Adjustment. Hence Faster Mold Change

USER FRIENDLY CONTROL

- Ergonomic Layout
- High Speed Microprocessor
- Direct Access Menu Keys
- Graphical Presentation of Machine Features
- Self Diagnostic & Fault Finding Capability
- Parameter Entry in Absolute Value

THE OMEGA SERVO

Injection Unit Specifications

IU	70	80	90	100	110	13500	125
OMEGA SERVO 550							
OMEGA SERVO 660							
OMEGA SERVO 775							
OMEGA SERVO 910							

Clamp Specifications

MODEL	TONNAGE	PLATEN SIZE (H X V)	TIE BAR SPACING (H X V)	MAX DAYLIGHT
	tons	mm	mm	mm
OMEGA SERVO 550	550	1245 X 1245	870 X 870	1676
OMEGA SERVO 660	660	1400 X 1400	950 X 950	1780
OMEGA SERVO 775	775	1680 X 1475	1150 X 950	1920
OMEGA SERVO 910	910	2000 X 1600	1530 X 1120	2350

STANDARD FEATURES

CLAMP	
Hollow Headless Ram with Mono Seal & No Piston Rings	●
Large Prefill Designed for Fast Tonnage Build-up	●
Rapid Traverse Cylinders	●
Conical Strain Rod Nuts & Controlled Stress on Tie Rods	●
Adjustable moving Platen Skates	●
Rigid Cast Platens with FEA	●
Adjustable Pressure setting of Closing & Opening Stage	●
Proportional Speed Control with 5 Closing & 5 Opening Speed	●
Adjustable 2 Stage Mold Safety Pressure & 2 Stage Speed	●
Position Based Ramping for Accurate Position Switching - Precise Speed & Pressure Control	●
Linear Position Transducer for Accurate Clamp Position Control	●
Sensitive Mold Protection with Try Again Circuit	●
Stage Wise Actual Time Display	●
Insert Molding Program	●
Actual Tonnage Display on Screen	●
Auto Lubrication for Clamp	●
Flash Chrome Plated Ram	●
Jam Bar	○
Part Drop Detect for Single Cavity	○
Extended Daylight with Ram Spacer	○

INJECTION	
6 Stage Injection Velocity & 15 Stage Injection Pressure Profile	●
5 Stage Screw Speed & 5 Stage Back Pressure Control (Setting) through Screen	●
Digital setting of Extruder RPM & Digital Read out of Actual RPM	●
Wide Choice of Injection Units with A-B-C Screw/Barrel Combinations	●
Easy Injection Unit Swivelling	●
Switch Over from Fill to Pack based on Position or Time or Pressure	●
Linear Position Transducer for Accurate Injection Position Control	●
Injection Decompression Before/ After Refilling or Both	●
Semi-Auto Purge, Cold Slug removal & Intrusion Molding Programs	●
Aluminum Chequered Plate below Purge Area	●
Sprue Break with Timer	●
Injection start, Suck-back & Melt Decompression -Delay Timer	●
Graphically Adjustable Alarm Bands for Injection Pressure	●
Nozzle Contact Force by Pressure Switch	●
Sliding Hopper	●
Bimetallic Barrel & Hardened/ Coated Screw	○

TEMPERATURE CONTROL	
Actual Current Display of Barrel Heating Zones	●
Heater Failure & Thermocouple Open Detection	●
Accurate PID Temperature Control	●
Feed Throat Temperature Indication	●
Auto Heat Startup & Shutdown	●
Heat Standby after set number of Cycles	●
Soak Timer for Cold Start Protection	●
High / Low Temperature Alarm	●
Set & Actual Temperature Data with Bar Graph	●
Insulated Heater Band	●
Oil Temperature Control for Heat Exchanger	●
Feed Throat Temperature Control	○
Extra Heating Zones	○

● - Standard Feature ○ - Optional Feature

HYDRAULICS	
Servo Motor Driven Pump	●
Ergonomic Hydraulic Layout for Easy Approach	●
Valves Placed near Actuators for Rapid Response	●
Pre-Healing Circuit for Hydraulic Oil	●
Low Oil Level Audible Alarm & Motor Shut Down	●
Continuous Oil Filtration with 10 Micron Filter	●
Audible Alarm for Filter Clogging	●

EJECTOR	
Knock-Out Bar	●
2 Stage Programmable Ejector Forward Profile with Soft Eject	●
Ejector Speed & Pressure adjustable on Screen	●
Linear Transducer for Ejector Position	●
Pulsating Ejector Strokes upto 9 Pulses	●
Intermediate Retract Set Point	●
Ejector Stay Forward & Forward Dwell Timer	●
Ejector on Fly	●
Pilot Operated Check Valve for Ejector	●
Air Ejection	○
Hydraulic Core pull	○
Interface for Ejector Retract Verification	○

CONTROLS	
18 freely process parameter selection out of 67 parameters for last 1000 cycles with graphics	●
10 freely process monitoring parameter selection out of 67 for alarm tolerance monitoring	●
10.4" TFT Color Display with Alpha - Numeric Keypad	●
Actual Injection Speed & Pressure Graph Display	●
80 Mold Data Storage	●
Configurable Multilevel Password with Operator's Name	●
Graphical Presentation of Last 48 Hours Production	●
Daily Production Data of Last 1 Year	●
Customized Setup Menu	●
High / Low Limit Display for Each Adjustable Parameter	●
I / O diagnosis - Analog & Digital	●
Timer Precision in 0.01 Second	●
Change Log Menu: logs last 100 Set Points Changes with Time & Date	●
Process Mode: Functions with its Co-functions on a Single Key Press	●
Note Pad & Maintenance Scheduling	●
Freely Programmable Smart Outputs & Inputs	●
Over View Screen with Graphical Display of Machine Functions	●
Soft Keys for Fast Access of Select Menus	●
Auto shut down	●
Visual & Audible Alarm	●
1000 Alarm History with Date & Time Log	●
Axis wise Graphical Cycle time Analysis	●
Batch Counter with option to turn off the motor	●
Mold data I Process data I Change log saving to External USB device	●
Freely Programmable Core Pull	●
Statistical Process Control (SPC) with Graphics	○

ADDITIONAL FEATURES	
Surge Suppressor Device	●
Y Strainer in Heat Exchanger Inlet	●
UV/OV Monitoring Relay-Voltage Monitor Relay	●
Water Manifolds	○
Water Battery with Temperature Indicator	○
Robot Interface (SPI / EUROMAP)	○

APPLICATIONS

• *AUTOMOTIVE*

• *INDUSTRIAL APPLICATIONS*

• *CONSTRUCTION*




APPLICATIONS

• *STORAGE AND TRANSPORT CONTAINERS*


• *HOUSEWARES AND APPLIANCE*



TECHNICAL SPECIFICATIONS

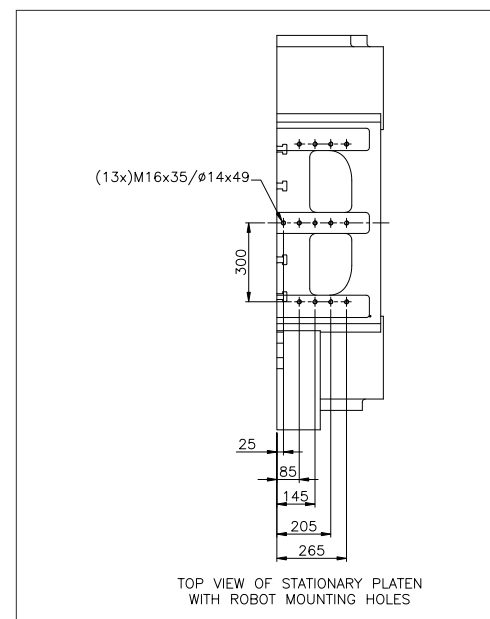


D M20x40 DEEP (44) HOLES




INTERNATIONAL SIZE		5500-2350			5500-3340			5500-4850			5500-6440		5500-7290
POWER PACK *		38.7 kW											
	UNIT	70 MM FRAME			80 MM FRAME			90 MM FRAME			100 MM FRAME		
	METRIC	A	B	C	A	B	C	A	B	C	A	B	C
INJECTION UNIT SPECIFICATIONS													
INJECTION CAPACITY MAX. (GPPS)	gms	1172	1530	1937	1722	2179	2690	2421	2989	3617	3288	3978	5137
THEORETICAL DISPLACEMENT	cc	1232	1608	2036	1810	2290	2827	2545	3142	3801	3456	4181	5400
INJECTION PRESSURE MAX.	bar	1909	1462	1155	1843	1456	1180	1906	1544	1276	1864	1540	1350
INJECTION RATE	cc/sec	591	772	977	629	796	983	592	731	885	622	753	883
INJECTION SCREW STROKE	mm	320	320	320	360	360	360	400	400	400	440	440	440
SCREW DIAMETER	mm	70	80	90	80	90	100	90	100	110	100	110	125
SCREW L/D RATIO		22.9	20	17.8	22.5	20	18	22.2	20	18.2	22	20	20
SCREW SPEED	rpm	250	239	212	207	207	187	152	152	152	122	122	122
SCREW TORQUE @ 172 BAR	Nm	3347	3347	4386	4875	4875	5384	6355	6355	6355	7924	7924	7924
PLASTICIZING RATE (STD SCOPE SCREW)	gm/sec	91	118	140	102	137	157	101	128	163	103	124	160
NO.OF PYROMETERS (BARREL+NOZZLE)		5+1			5+1			5+1			6+1		
TOTAL HEAT CAPACITY	kW	29.8			43.3			54			59.9		62.4
CLAMP UNIT SPECIFICATIONS													
CLAMP FORCE	ton	550			550			550			550		
CLAMP STROKE	mm	1140			1140			1140			1140		
MAXIMUM DAYLIGHT	mm	1676			1676			1676			1676		
MINIMUM MOULD HEIGHT	mm	536			536			536			536		
PLATEN SIZE (H X V)	mm	1245 X 1245			1245 X 1245			1245 X 1245			1245 X 1245		
DISTANCE BETWEEN TIE ROD	mm	870 X 870			870 X 870			870 X 870			870 X 870		
TIE ROD DIAMETER	mm	160			160			160			160		
EJECTOR STROKE	mm	200			200			200			200		
EJECTOR FORCE	ton	12			12			12			12		
MOULD WEIGHT CAPACITY (STAT. / MOVING)	kg	7060 (2353 / 4707)			7060 (2353 / 4707)			7060 (2353 / 4707)			7060 (2353 / 4707)		
GENERAL													
SERVO DRIVE *	kW	38.7			38.7			38.7			38.7		
OIL TANK CAPACITY	L	1375			1375			1375			1375		
WATER REQUIREMENT (INLET TEMP. 29°C)	lpm	215			215			215			215		
CONNECTED LOAD	kW	68.5			82			92.7			98.6		101.1
MACHINE DIMENSION (L X W X H)	m	8.91 X 2.99 X 2.80			9.39 X 2.99 X 2.80			9.80 X 2.99 X 2.80			10.22 X 2.99 X 2.80		10.44 X 2.99 X 2.80
MACHINE WEIGHT	kg	29800			30500			31500			32500		

All machine dimensions and specifications are subject to change. Values are for reference only. These values are for standard machine power.

TECHNICAL SPECIFICATIONS

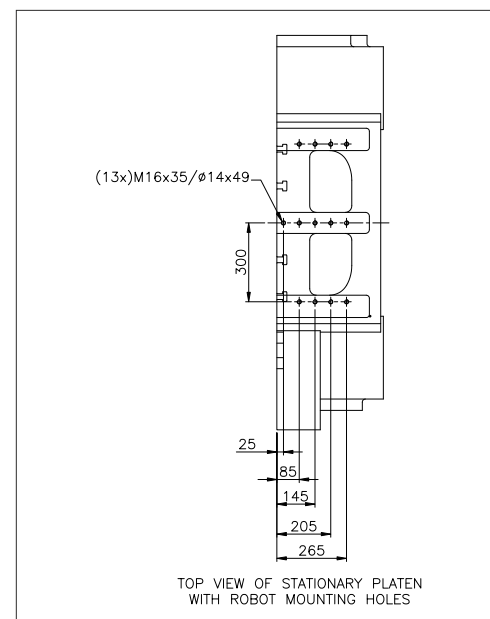

D M20x40 DEEP (44) HOLES





INTERNATIONAL SIZE		5500-3340			5500-4850			5500-6440		5500-7290
POWER PACK *		48.1 kW								
	UNIT	80 MM FRAME			90 MM FRAME			100 MM FRAME		
	METRIC	A	B	C	A	B	C	A	B	C
INJECTION UNIT SPECIFICATIONS										
INJECTION CAPACITY MAX. (GPPS)	gms	1722	2179	2690	2421	2989	3617	3288	3978	5137
THEORETICAL DISPLACEMENT	cc	1810	2290	2827	2545	3142	3801	3456	4181	5400
INJECTION PRESSURE MAX.	bar	1843	1456	1180	1906	1544	1276	1864	1540	1350
INJECTION RATE	cc/sec	658	832	1027	620	765	924	651	788	923
INJECTION SCREW STROKE	mm	360	360	360	400	400	400	440	440	440
SCREW DIAMETER	mm	80	90	100	90	100	110	100	110	125
SCREW L/D RATIO		22.5	20	18	22.2	20	18.2	22	20	20
SCREW SPEED	rpm	217	212	191	159	159	159	128	128	128
SCREW TORQUE @ 172 BAR	Nm	4875	4875	5384	6355	6355	6355	7924	7924	7924
PLASTICIZING RATE (STD SCOPE SCREW)	gm/sec	107	140	160	105	134	170	107	130	168
NO.OF PYROMETERS (BARREL+NOZZLE)		5+1			5+1			6+1		
TOTAL HEAT CAPACITY	kW	43.3			54			59.9		62.4
CLAMP UNIT SPECIFICATIONS										
CLAMP FORCE	ton	550			550			550		
CLAMP STROKE	mm	1140			1140			1140		
MAXIMUM DAYLIGHT	mm	1676			1676			1676		
MINIMUM MOULD HEIGHT	mm	536			536			536		
PLATEN SIZE (H X V)	mm	1245 X 1245			1245 X 1245			1245 X 1245		
DISTANCE BETWEEN TIE ROD	mm	870 X 870			870 X 870			870 X 870		
TIE ROD DIAMETER	mm	160			160			160		
EJECTOR STROKE	mm	200			200			200		
EJECTOR FORCE	ton	12			12			12		
MOULD WEIGHT CAPACITY (STAT. / MOVING)	kg	7060 (2353 / 4707)			7060 (2353 / 4707)			7060 (2353 / 4707)		
GENERAL										
SERVO DRIVE *	kW	48.1			48.1			48.1		
OIL TANK CAPACITY	L	1375			1375			1375		
WATER REQUIREMENT (INLET TEMP. 29°C)	lpm	215			215			215		
CONNECTED LOAD	kW	91.4			102.1			108		110.5
MACHINE DIMENSION (L X W X H)	m	9.39 X 2.99 X 2.80			9.80 X 2.99 X 2.80			10.22 X 2.99 X 2.80		10.44 X 2.99 X 2.80
MACHINE WEIGHT	kg	30500			31500			32500		

All machine dimensions and specifications are subject to change. Values are for reference only. These values are for standard machine power.

THE OMEGA SERVO
TONNAGE: 660


Injection Unit 80, 90, 100, 110

TECHNICAL SPECIFICATIONS

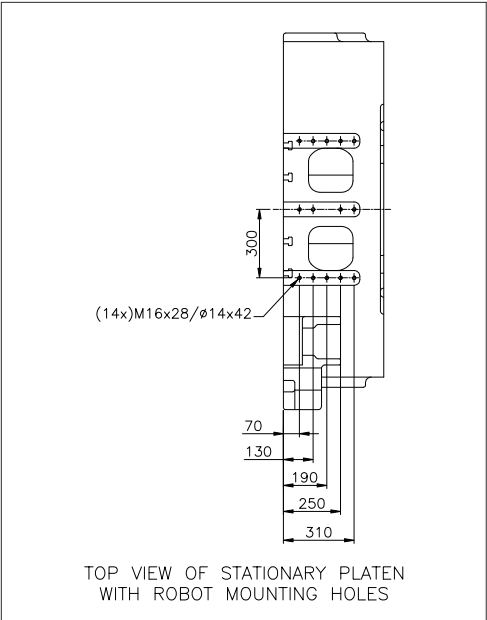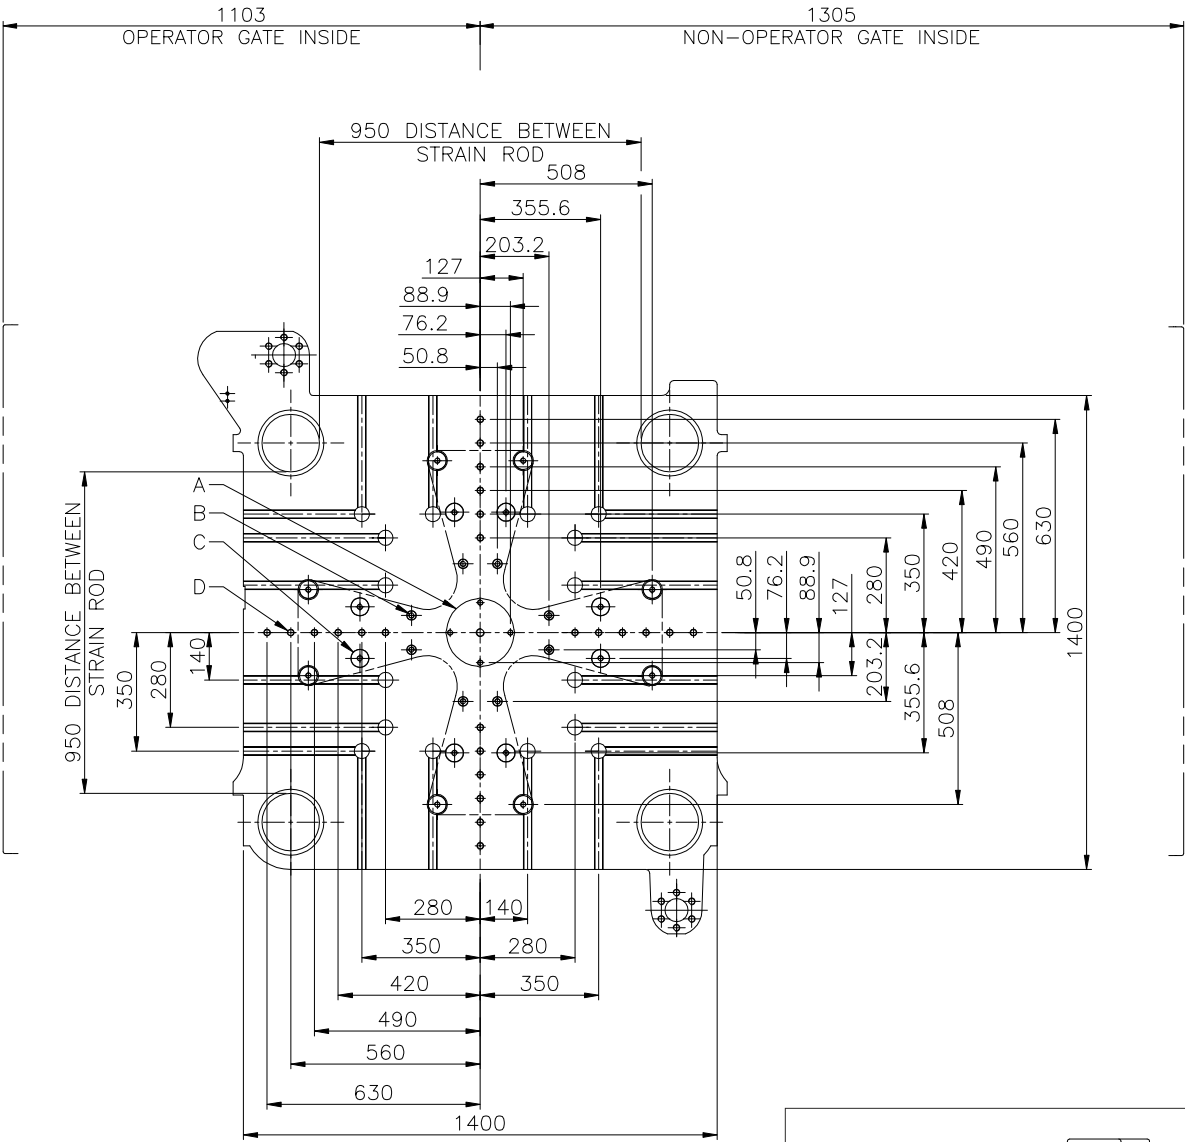

ALL DIMENSIONS ARE IN MM

- A MOVING PLATEN: Ø200 THRU BORE
K/O BAR CENTER HOLE M24
STATIONARY PLATEN:
Ø200 WITH LOCATING RING
Ø315(+0.052/0.00) WITHOUT LOCATING RING
- B Ø27 THRU, (12) HOLES & K/O BAR HOLES M16x40 DEEP (28) NOS.
- C Ø52.40 THRU, (16) HOLES
- D M20x40 DEEP (24) HOLES

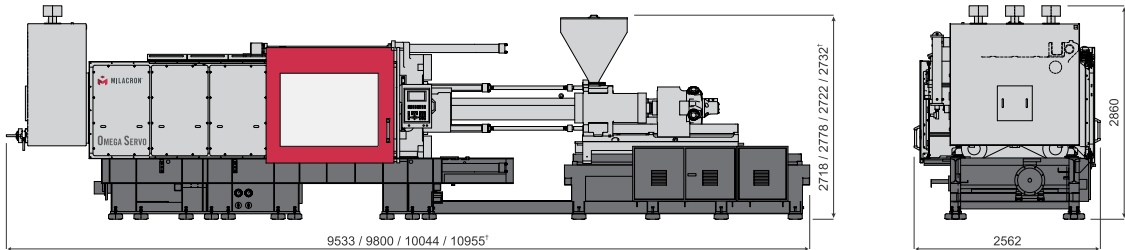

1U 80 / 90 / 100 / 110

OMEGA SERVO 660

INTERNATIONAL SIZE		6600-3340			6600-4850			6600-6440		6600-7290
POWER PACK *		38.7 kW								
	UNIT	80 MM FRAME			90 MM FRAME			100 MM FRAME		
	METRIC	A	B	C	A	B	C	A	B	C
INJECTION UNIT SPECIFICATIONS										
INJECTION CAPACITY MAX. (GPPS)	gms	1722	2179	2690	2421	2989	3617	3288	3978	5137
THEORETICAL DISPLACEMENT	cc	1810	2290	2827	2545	3142	3801	3456	4181	5400
INJECTION PRESSURE MAX.	bar	1843	1456	1180	1906	1544	1276	1864	1540	1350
INJECTION RATE	cc/sec	629	796	983	592	731	885	622	753	883
INJECTION SCREW STROKE	mm	360	360	360	400	400	400	440	440	440
SCREW DIAMETER	mm	80	90	100	90	100	110	100	110	125
SCREW L/D RATIO		22.5	20	18	22.2	20	18.2	22	20	20
SCREW SPEED	rpm	207	207	187	152	152	152	122	122	122
SCREW TORQUE @ 172 BAR	Nm	4875	4875	5384	6355	6355	6355	7924	7924	7924
PLASTICIZING RATE (STD SCOPE SCREW)	gm/sec	102	137	157	101	128	163	103	124	160
NO.OF PYROMETERS (BARREL+NOZZLE)		5+1			5+1			6+1		
TOTAL HEAT CAPACITY	kW	43.3			54			59.9		62.4
CLAMP UNIT SPECIFICATIONS										
CLAMP FORCE	ton	660			660			660		
CLAMP STROKE	mm	1320			1320			1320		
MAXIMUM DAYIGHT	mm	1780			1780			1780		
MINIMUM MOULD HEIGHT	mm	460			460			460		
PLATEN SIZE (H X V)	mm	1400 X 1400			1400 X 1400			1400 X 1400		
DISTANCE BETWEEN TIE ROD	mm	950 X 950			950 X 950			950 X 950		
TIE ROD DIAMETER	mm	170			170			170		
EJECTOR STROKE	mm	200			200			200		
EJECTOR FORCE	ton	12			12			12		
MOULD WEIGHT CAPACITY (STAT. / MOVING)	kg	9455 (3152 / 6303)			9455 (3152 / 6303)			9455 (3152 / 6303)		
GENERAL										
SERVO DRIVE *	kW	38.7			38.7			38.7		
OIL TANK CAPACITY	L	1995			1995			1995		
WATER REQUIREMENT (INLET TEMP. 29°C)	lpm	215			215			215		
CONNECTED LOAD	kW	82			92.7			98.6		101.1
MACHINE DIMENSION (L X W X H)	m	10.01 X 3.01 X 2.93			10.40 X 3.01 X 2.93			10.72 X 3.01 X 2.93		11.03 X 3.01 X 2.93
MACHINE WEIGHT	kg	33000			34000			35000		



* UNDER SPECIFIED CONDITION

All machine dimensions and specifications are subject to change. Values are for reference only. These values are for standard machine power.

THE OMEGA SERVO
TONNAGE: 660

Injection Unit 80, 90, 100, 110

TECHNICAL SPECIFICATIONS

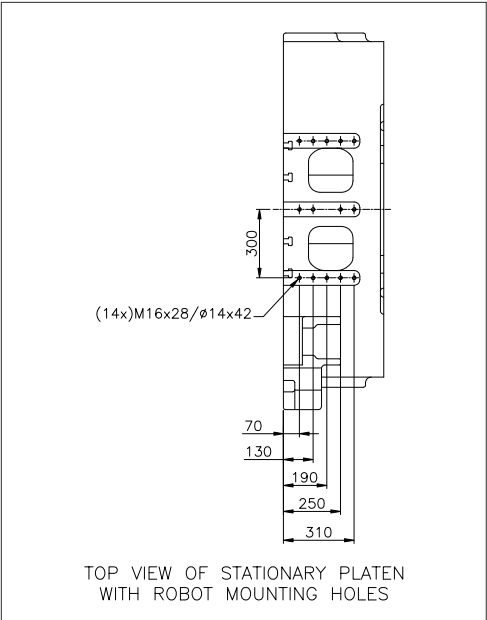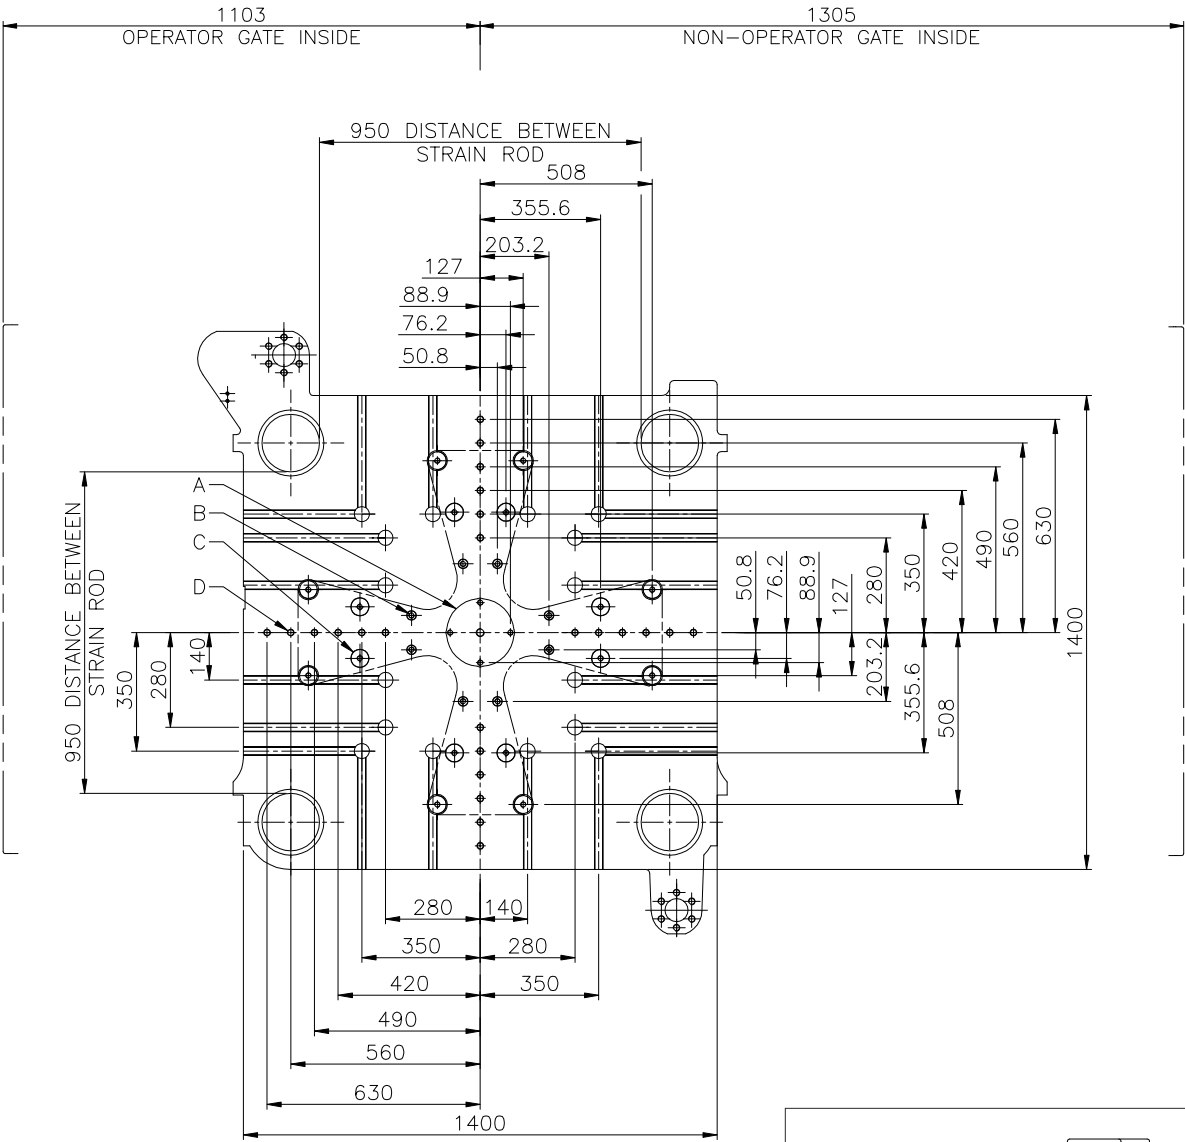


ALL DIMENSIONS ARE IN MM

A MOVING PLATEN: Ø200 THRU BORE
K/O BAR CENTER HOLE M24
STATIONARY PLATEN:
Ø200 WITH LOCATING RING
Ø315(+0.052/0.00) WITHOUT LOCATING RING

B Ø27 THRU, (12) HOLES & K/O BAR HOLES M16x40 DEEP (28) NOS.

C Ø52.40 THRU, (16) HOLES

D M20x40 DEEP (24) HOLES

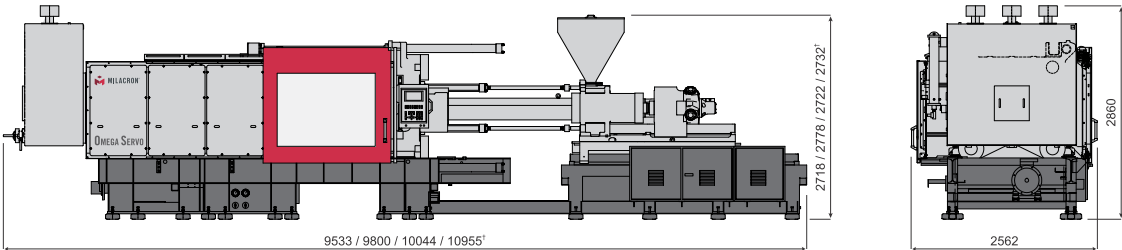

1U 80 / 90 / 100 / 110

OMEGA SERVO 660

INTERNATIONAL SIZE		6600-3340			6600-4850			6600-6440	6600-7290	6600-10070		
POWER PACK *		48.1 kW										
	UNIT	80 MM FRAME			90 MM FRAME			100 MM FRAME			110 MM FRAME	
	METRIC	A	B	C	A	B	C	A	B	C	A	B
INJECTION UNIT SPECIFICATIONS												
INJECTION CAPACITY MAX. (GPPS)	gms	1722	2179	2690	2421	2989	3617	3288	3978	5137	5063	6538
THEORETICAL DISPLACEMENT	cc	1810	2290	2827	2545	3142	3801	3456	4181	5400	5322	6872
INJECTION PRESSURE MAX.	bar	1843	1456	1180	1906	1544	1276	1864	1540	1350	1891	1465
INJECTION RATE	cc/sec	658	832	1027	620	765	924	651	788	923	541	699
INJECTION SCREW STROKE	mm	360	360	360	400	400	400	440	440	440	560	560
SCREW DIAMETER	mm	80	90	100	90	100	110	100	110	125	110	125
SCREW L/D RATIO		22.5	20	18	22.2	20	18.2	22	20	20	22.7	20
SCREW SPEED	rpm	217	212	191	159	159	159	128	128	128	128	128
SCREW TORQUE @ 172 BAR	Nm	4875	4875	5384	6355	6355	6355	7924	7924	7924	7924	7924
PLASTICIZING RATE (STD SCOPE SCREW)	gm/sec	107	140	160	105	134	170	107	130	168	136	168
NO.OF PYROMETERS (BARREL+NOZZLE)		5+1			5+1			6+1			6+1	
TOTAL HEAT CAPACITY	kW	43.3			54			59.9		62.4		64.7
CLAMP UNIT SPECIFICATIONS												
CLAMP FORCE	ton	660			660			660			660	
CLAMP STROKE	mm	1320			1320			1320			1320	
MAXIMUM DAYIGHT	mm	1780			1780			1780			1780	
MINIMUM MOULD HEIGHT	mm	460			460			460			460	
PLATEN SIZE (H X V)	mm	1400 X 1400			1400 X 1400			1400 X 1400			1400 X 1400	
DISTANCE BETWEEN TIE ROD	mm	950 X 950			950 X 950			950 X 950			950 X 950	
TIE ROD DIAMETER	mm	170			170			170			170	
EJECTOR STROKE	mm	200			200			200			200	
EJECTOR FORCE	ton	12			12			12			12	
MOULD WEIGHT CAPACITY (STAT. / MOVING)	kg	9455 (3152 / 6303)			9455 (3152 / 6303)			9455 (3152 / 6303)			9455 (3152 / 6303)	
GENERAL												
SERVO DRIVE *	kW	48.1			48.1			48.1			48.1	
OIL TANK CAPACITY	L	1995			1995			1995			1995	
WATER REQUIREMENT (INLET TEMP. 29°C)	lpm	300			300			300			300	
CONNECTED LOAD	kW	91.4			102.1			108		110.5		112.8
MACHINE DIMENSION (L X W X H)	m	10.01 X 3.01 X 2.93			10.40 X 3.01 X 2.93			10.72 X 3.01 X 2.93		11.03 X 3.01 X 2.93		11.26 X 3.01 X 2.93
MACHINE WEIGHT	kg	33000			34000			35000			36500	



* UNDER SPECIFIED CONDITION

All machine dimensions and specifications are subject to change. Values are for reference only. These values are for standard machine power.

THE OMEGA SERVO
TONNAGE: 660


Injection Unit 80, 90, 100, 110

TECHNICAL SPECIFICATIONS

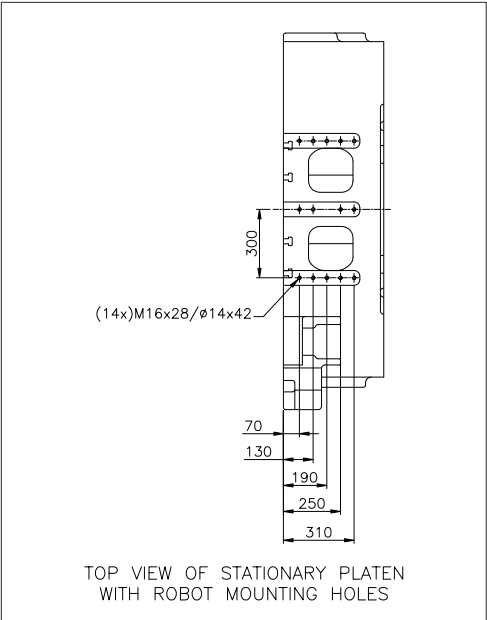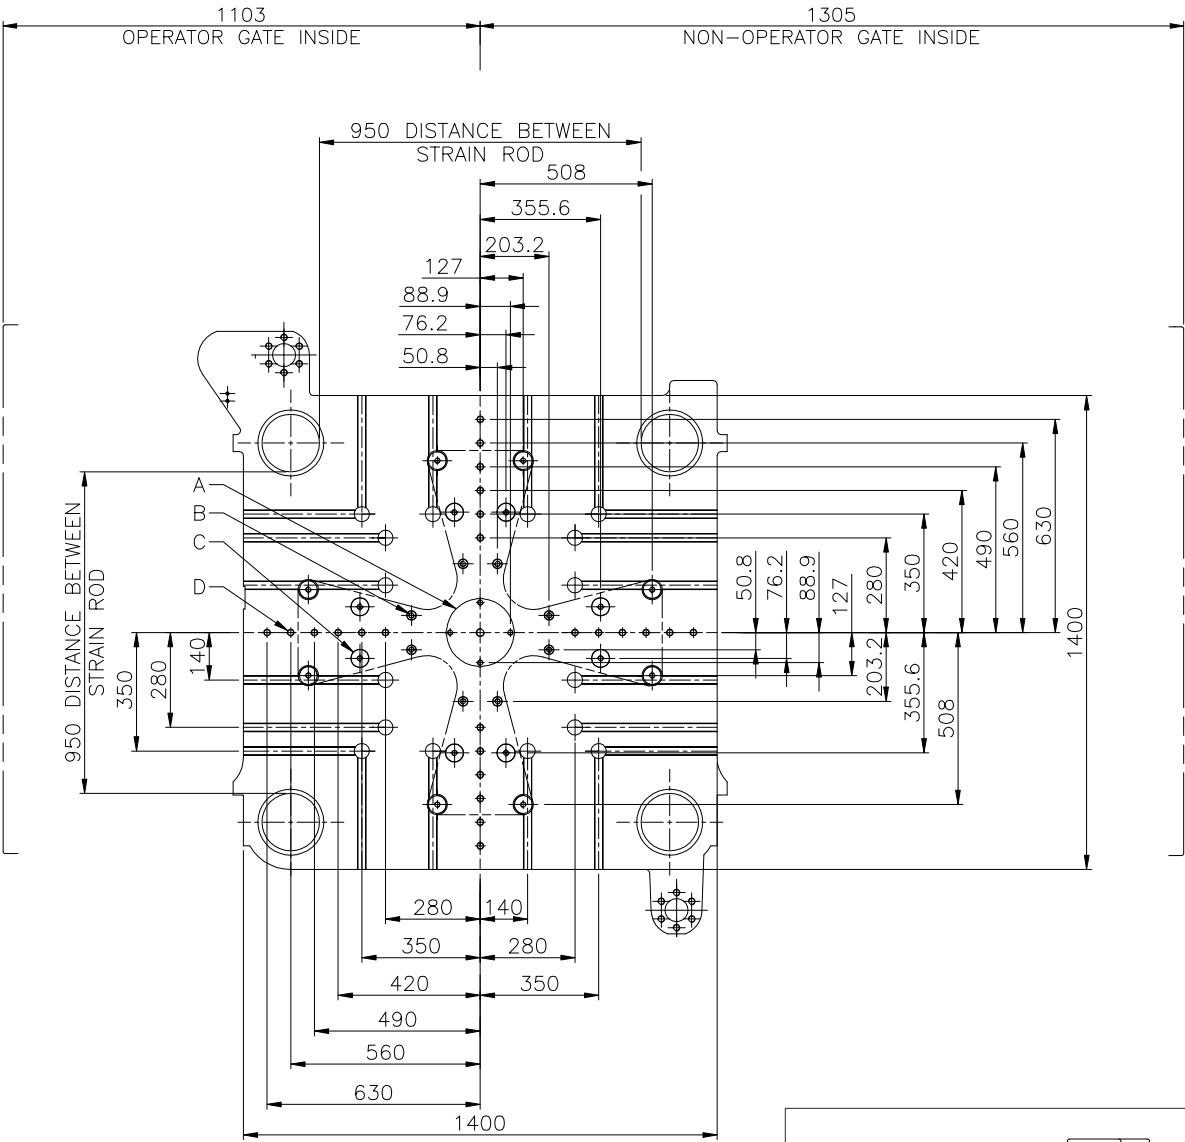

ALL DIMENSIONS ARE IN MM

- A MOVING PLATEN: Ø200 THRU BORE
K/O BAR CENTER HOLE M24
STATIONARY PLATEN:
Ø200 WITH LOCATING RING
Ø315(+0.052/0.00) WITHOUT LOCATING RING
- B Ø27 THRU, (12) HOLES & K/O BAR HOLES M16x40 DEEP (28) NOS.
- C Ø52.40 THRU, (16) HOLES
- D M20x40 DEEP (24) HOLES

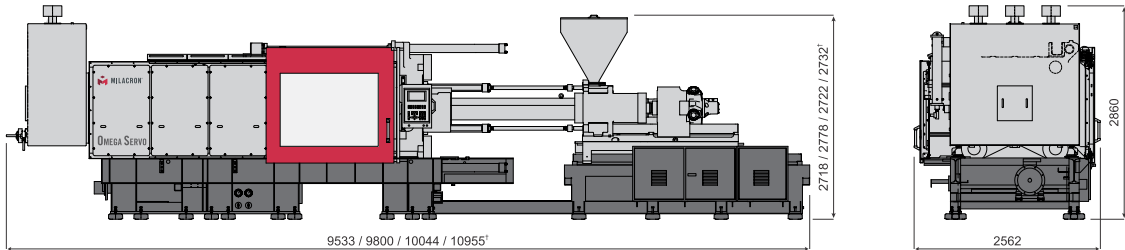

OMEGA SERVO 660



INTERNATIONAL SIZE		6600-10700			6600-6440		6600-7290	6600-10070	
POWER PACK *		54.4 kW							
	UNIT	90 MM FRAME			100 MM FRAME			110 MM FRAME	
	METRIC	A	B	C	A	B	C	A	B
INJECTION UNIT SPECIFICATIONS									
INJECTION CAPACITY MAX. (GPPS)	gms	2421	2989	3617	3288	3978	5137	5063	6538
THEORETICAL DISPLACEMENT	cc	2545	3142	3801	3456	4181	5400	5322	6872
INJECTION PRESSURE MAX.	bar	1906	1544	1276	1864	1540	1350	1891	1465
INJECTION RATE	cc/sec	897	1108	1340	943	1141	1337	784	1012
INJECTION SCREW STROKE	mm	400	400	400	440	440	440	560	560
SCREW DIAMETER	mm	90	100	110	100	110	125	110	125
SCREW L/D RATIO		22.2	20	18.2	22	20	20	22.7	20
SCREW SPEED	rpm	212	191	174	174	174	153	173	153
SCREW TORQUE @ 172 BAR	Nm	6355	6355	6355	7924	7924	7924	7924	7924
PLASTICIZING RATE (STD SCOPE SCREW)	gm/sec	140	160	185	146	177	201	185	201
NO.OF PYROMETERS (BARREL+NOZZLE)		5+1			6+1			6+1	
TOTAL HEAT CAPACITY	kW	54			59.9		62.4	64.7	
CLAMP UNIT SPECIFICATIONS									
CLAMP FORCE	ton	660			660			660	
CLAMP STROKE	mm	1320			1320			1320	
MAXIMUM DAYIGHT	mm	1780			1780			1780	
MINIMUM MOULD HEIGHT	mm	460			460			460	
PLATEN SIZE (H X V)	mm	1400 X 1400			1400 X 1400			1400 X 1400	
DISTANCE BETWEEN TIE ROD	mm	950 X 950			950 X 950			950 X 950	
TIE ROD DIAMETER	mm	170			170			170	
EJECTOR STROKE	mm	200			200			200	
EJECTOR FORCE	ton	12			12			12	
MOULD WEIGHT CAPACITY (STAT. / MOVING)	kg	9455 (3152 / 6303)			9455 (3152 / 6303)			9455 (3152 / 6303)	
GENERAL									
SERVO DRIVE *	kW	54.4			54.4			54.4	
OIL TANK CAPACITY	L	1995			1995			1995	
WATER REQUIREMENT (INLET TEMP. 29°C)	lpm	300			300			300	
CONNECTED LOAD	kW	108.4			114.3		116.8	119.1	
MACHINE DIMENSION (L X W X H)	m	10.40 X 3.01 X 2.93			10.72 X 3.01 X 2.93		11.03 X 3.01 X 2.93	11.26 X 3.01 X 2.93	
MACHINE WEIGHT	kg	34000			35000			36500	

* UNDER SPECIFIED CONDITION

All machine dimensions and specifications are subject to change. Values are for reference only. These values are for standard machine power.


THE OMEGA SERVO
TONNAGE: 775

Injection Unit 90, 100, 110
TECHNICAL SPECIFICATIONS

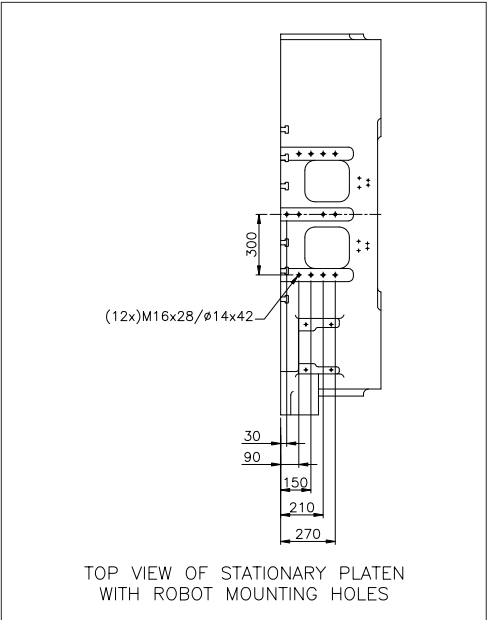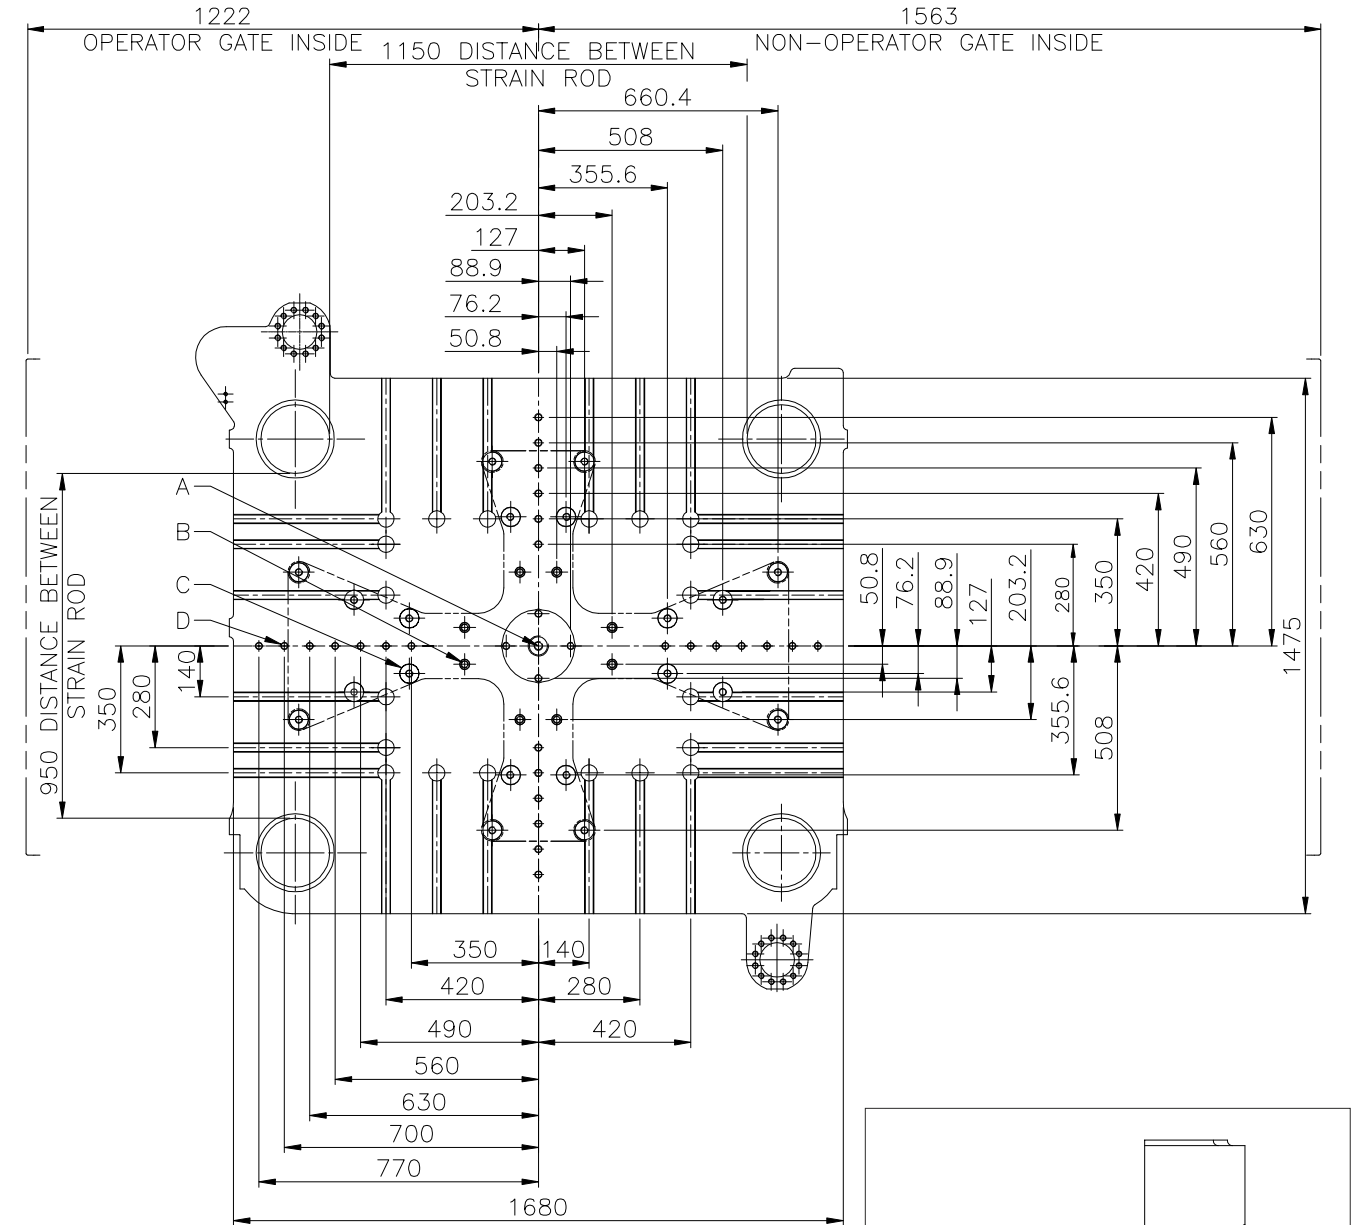

ALL DIMENSIONS ARE IN MM

- A MOVING PLATEN: Ø200 THRU BORE
K/O BAR CENTER HOLE M24
STATIONARY PLATEN:
Ø200(+0.072/0.00) WITH LOCATING RING
Ø315(+0.052/0.00) WITHOUT LOCATING RING
- B Ø27 THRU, (12) HOLES & K/O BAR HOLES M20x50 DEEP (32) NOS.
- C Ø52.40 THRU, (20) HOLES
- D M20x40 DEEP (26) HOLES

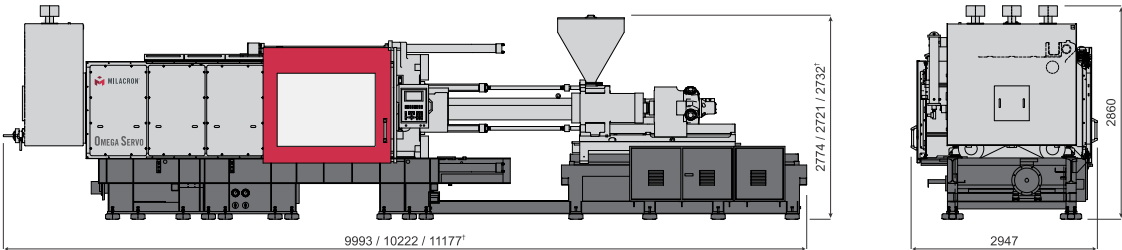

1U 90 / 100 / 110


OMEGA SERVO 775

INTERNATIONAL SIZE		7750-4850			7750-6440		7750-7290	7750-10070	
POWER PACK *		38.7 kW							
	UNIT	90 MM FRAME			100 MM FRAME			110 MM FRAME	
	METRIC	A	B	C	A	B	C	A	B
INJECTION UNIT SPECIFICATIONS									
INJECTION CAPACITY MAX. (GPPS)	gms	2421	2989	3617	3288	3978	5137	5063	6538
THEORETICAL DISPLACEMENT	cc	2545	3142	3801	3456	4181	5400	5322	6872
INJECTION PRESSURE MAX.	bar	1906	1544	1276	1864	1540	1350	1891	1465
INJECTION RATE	cc/sec	592	731	885	622	753	883	517	668
INJECTION SCREW STROKE	mm	400	400	400	440	440	440	560	560
SCREW DIAMETER	mm	90	100	110	100	110	125	110	125
SCREW L/D RATIO		22.2	20	18.2	22	20	20	22.7	20
SCREW SPEED	rpm	152	152	152	122	122	122	122	122
SCREW TORQUE @ 172 BAR	Nm	6355	6355	6355	7924	7924	7924	7924	7924
PLASTICIZING RATE (STD SCOPE SCREW)	gm/sec	101	128	163	103	124	160	130	160
NO.OF PYROMETERS (BARREL+NOZZLE)		5+1			6+1			6+1	
TOTAL HEAT CAPACITY	kW	54			59.9		62.4	64.7	
CLAMP UNIT SPECIFICATIONS									
CLAMP FORCE	ton	775			775			775	
CLAMP STROKE	mm	1320			1320			1320	
MAXIMUM DAYIGHT	mm	1920			1920			1920	
MINIMUM MOULD HEIGHT	mm	600			600			600	
PLATEN SIZE (H X V)	mm	1680 X 1475			1680 X 1475			1680 X 1475	
DISTANCE BETWEEN TIE ROD	mm	1150 X 950			1150 X 950			1150 X 950	
TIE ROD DIAMETER	mm	190			190			190	
EJECTOR STROKE	mm	200			200			200	
EJECTOR FORCE	ton	18.3			18.3			18.3	
MOULD WEIGHT CAPACITY (STAT. / MOVING)	kg	10820 (3607 / 7213)			10820 (3607 / 7213)			10820 (3607 / 7213)	
GENERAL									
SERVO DRIVE *	kW	38.7			38.7			38.7	
OIL TANK CAPACITY	L	1995			1995			1995	
WATER REQUIREMENT (INLET TEMP. 29°C)	lpm	215			215			215	
CONNECTED LOAD	kW	92.7			98.6		101.1	103.4	
MACHINE DIMENSION (L X W X H)	m	10.57 X 3.37 X 2.93			10.89 X 3.37 X 2.93		11.20 X 3.37 X 2.93	11.44 X 3.37 X 2.93	
MACHINE WEIGHT	kg	40000			41000			42500	

* UNDER SPECIFIED CONDITION

All machine dimensions and specifications are subject to change. Values are for reference only. These values are for standard machine power.

TECHNICAL SPECIFICATIONS

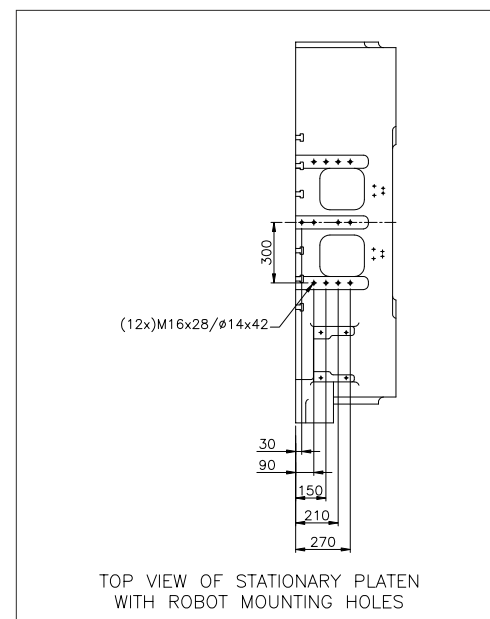

D M20x40 DEEP (26) HOLES





INTERNATIONAL SIZE		7750-4850			7750-6440		7750-7290	7750-10070	
POWER PACK *		48.1 kW							
	UNIT	90 MM FRAME			100 MM FRAME			110 MM FRAME	
	METRIC	A	B	C	A	B	C	A	B
INJECTION UNIT SPECIFICATIONS									
INJECTION CAPACITY MAX. (GPPS)	gms	2421	2989	3617	3288	3978	5137	5063	6538
THEORETICAL DISPLACEMENT	cc	2545	3142	3801	3456	4181	5400	5322	6872
INJECTION PRESSURE MAX.	bar	1906	1544	1276	1864	1540	1350	1891	1465
INJECTION RATE	cc/sec	620	765	924	651	788	923	541	699
INJECTION SCREW STROKE	mm	400	400	400	440	440	440	560	560
SCREW DIAMETER	mm	90	100	110	100	110	125	110	125
SCREW L/D RATIO		22.2	20	18.2	22	20	20	22.7	20
SCREW SPEED	rpm	159	159	159	128	128	128	128	128
SCREW TORQUE @ 172 BAR	Nm	6355	6355	6355	7924	7924	7924	7924	7924
PLASTICIZING RATE (STD SCOPE SCREW)	gm/sec	105	134	170	107	130	168	136	168
NO.OF PYROMETERS (BARREL+NOZZLE)		5+1			6+1			6+1	
TOTAL HEAT CAPACITY	kW	54			59.9		62.4	64.7	
CLAMP UNIT SPECIFICATIONS									
CLAMP FORCE	ton	775			775			775	
CLAMP STROKE	mm	1320			1320			1320	
MAXIMUM DAYIGHT	mm	1920			1920			1920	
MINIMUM MOULD HEIGHT	mm	600			600			600	
PLATEN SIZE (H X V)	mm	1680 X 1475			1680 X 1475			1680 X 1475	
DISTANCE BETWEEN TIE ROD	mm	1150 X 950			1150 X 950			1150 X 950	
TIE ROD DIAMETER	mm	190			190			190	
EJECTOR STROKE	mm	200			200			200	
EJECTOR FORCE	ton	18.3			18.3			18.3	
MOULD WEIGHT CAPACITY (STAT. / MOVING)	kg	10820 (3607 / 7213)			10820 (3607 / 7213)			10820 (3607 / 7213)	
GENERAL									
SERVO DRIVE *	kW	48.1			48.1			48.1	
OIL TANK CAPACITY	L	1995			1995			1995	
WATER REQUIREMENT (INLET TEMP. 29°C)	lpm	300			300			300	
CONNECTED LOAD	kW	102.1			108		110.5	112.8	
MACHINE DIMENSION (L X W X H)	m	10.57 X 3.37 X 2.93			10.89 X 3.37 X 2.93		11.20 X 3.37 X 2.93	11.44 X 3.37 X 2.93	
MACHINE WEIGHT	kg	40000			41000			42500	

All machine dimensions and specifications are subject to change. Values are for reference only. These values are for standard machine power.


THE OMEGA SERVO
TONNAGE: 775

Injection Unit 90, 100, 110
TECHNICAL SPECIFICATIONS

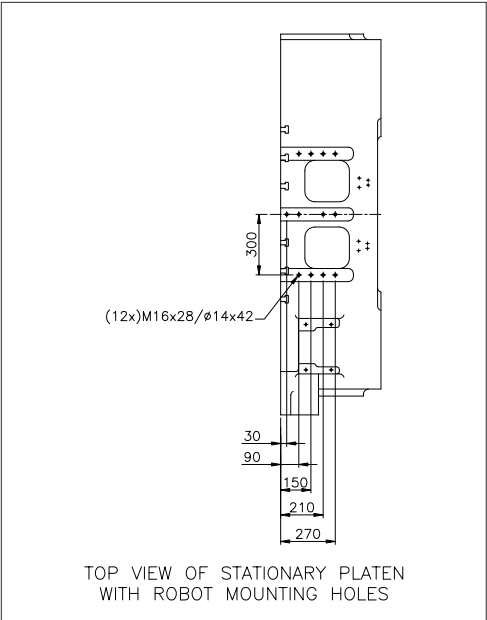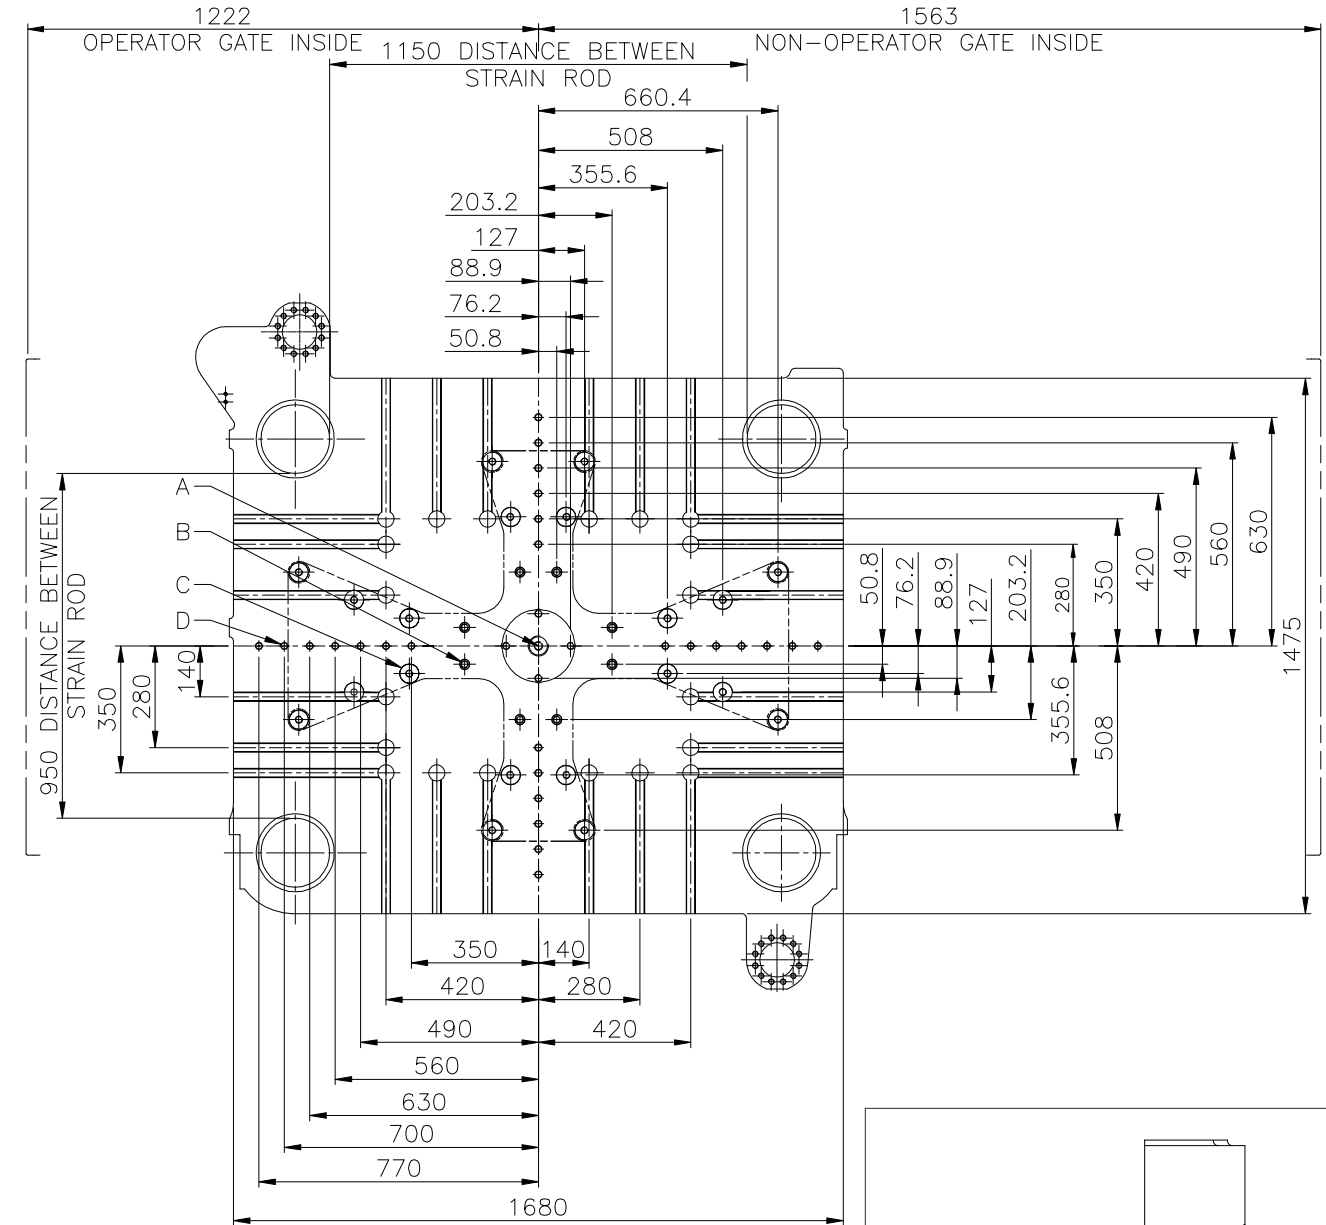

ALL DIMENSIONS ARE IN MM

- A MOVING PLATEN: Ø200 THRU BORE
K/O BAR CENTER HOLE M24
STATIONARY PLATEN:
Ø200(+0.072/0.00) WITH LOCATING RING
Ø315(+0.052/0.00) WITHOUT LOCATING RING
- B Ø27 THRU, (12) HOLES & K/O BAR HOLES M20x50 DEEP (32) NOS.
- C Ø52.40 THRU, (20) HOLES
- D M20x40 DEEP (26) HOLES

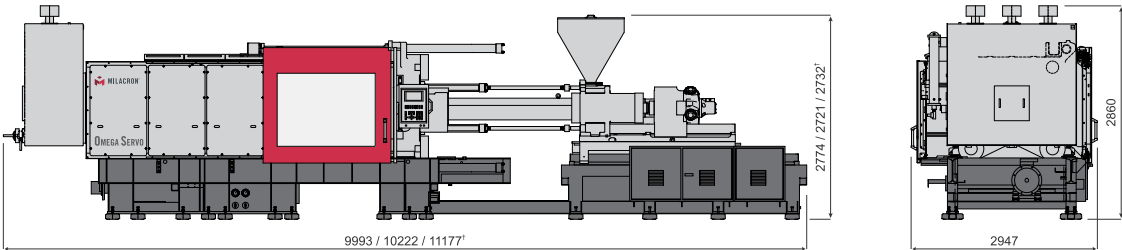

1U 90 / 100 / 110

OMEGA SERVO 775



INTERNATIONAL SIZE		7750-4850			7750-6440		7750-7290	7750-10070	
POWER PACK *		54.4 kW							
	UNIT	90 MM FRAME			100 MM FRAME			110 MM FRAME	
	METRIC	A	B	C	A	B	C	A	B
INJECTION UNIT SPECIFICATIONS									
INJECTION CAPACITY MAX. (GPPS)	gms	2421	2989	3617	3288	3978	5137	5063	6538
THEORETICAL DISPLACEMENT	cc	2545	3142	3801	3456	4181	5400	5322	6872
INJECTION PRESSURE MAX.	bar	1906	1544	1276	1864	1540	1350	1891	1465
INJECTION RATE	cc/sec	897	1108	1340	943	1141	1337	784	1012
INJECTION SCREW STROKE	mm	400	400	400	440	440	440	560	560
SCREW DIAMETER	mm	90	100	110	100	110	125	110	125
SCREW L/D RATIO		22.2	20	18.2	22	20	20	22.7	20
SCREW SPEED	rpm	212	191	174	174	174	153	173	153
SCREW TORQUE @ 172 BAR	Nm	6355	6355	6355	7924	7924	7924	7924	7924
PLASTICIZING RATE (STD SCOPE SCREW)	gm/sec	140	160	185	146	177	201	185	201
NO.OF PYROMETERS (BARREL+NOZZLE)		5+1			6+1			6+1	
TOTAL HEAT CAPACITY	kW	54			59.9		62.4	64.7	
CLAMP UNIT SPECIFICATIONS									
CLAMP FORCE	ton	775			775			775	
CLAMP STROKE	mm	1320			1320			1320	
MAXIMUM DAYIGHT	mm	1920			1920			1920	
MINIMUM MOULD HEIGHT	mm	600			600			600	
PLATEN SIZE (H X V)	mm	1680 X 1475			1680 X 1475			1680 X 1475	
DISTANCE BETWEEN TIE ROD	mm	1150 X 950			1150 X 950			1150 X 950	
TIE ROD DIAMETER	mm	190			190			190	
EJECTOR STROKE	mm	200			200			200	
EJECTOR FORCE	ton	18.3			18.3			18.3	
MOULD WEIGHT CAPACITY (STAT. / MOVING)	kg	10820 (3607 / 7213)			10820 (3607 / 7213)			10820 (3607 / 7213)	
GENERAL									
SERVO DRIVE *	kW	54.4			54.4			54.4	
OIL TANK CAPACITY	L	1995			1995			1995	
WATER REQUIREMENT (INLET TEMP. 29°C)	lpm	300			300			300	
CONNECTED LOAD	kW	108.4			114.3		116.8	119.1	
MACHINE DIMENSION (L X W X H)	m	10.57 X 3.37 X 2.93			10.89 X 3.37 X 2.93		11.20 X 3.37 X 2.93	11.44 X 3.37 X 2.93	
MACHINE WEIGHT	kg	40000			41000			42500	

* UNDER SPECIFIED CONDITION

All machine dimensions and specifications are subject to change. Values are for reference only. These values are for standard machine power.


THE OMEGA SERVO
TONNAGE: 910

Injection Unit 90, 100, 110, 13500, 125
TECHNICAL SPECIFICATIONS

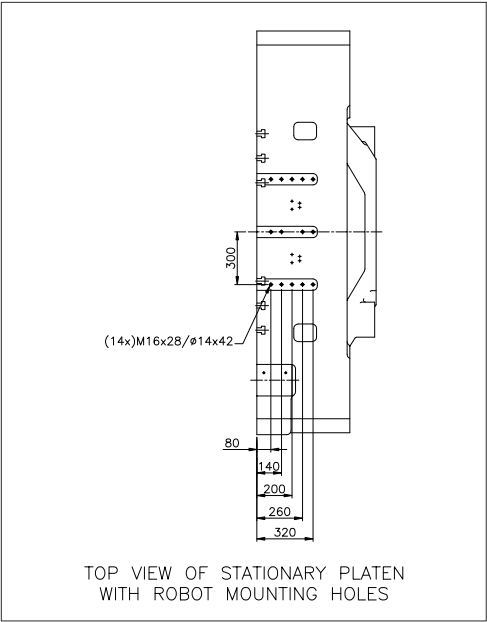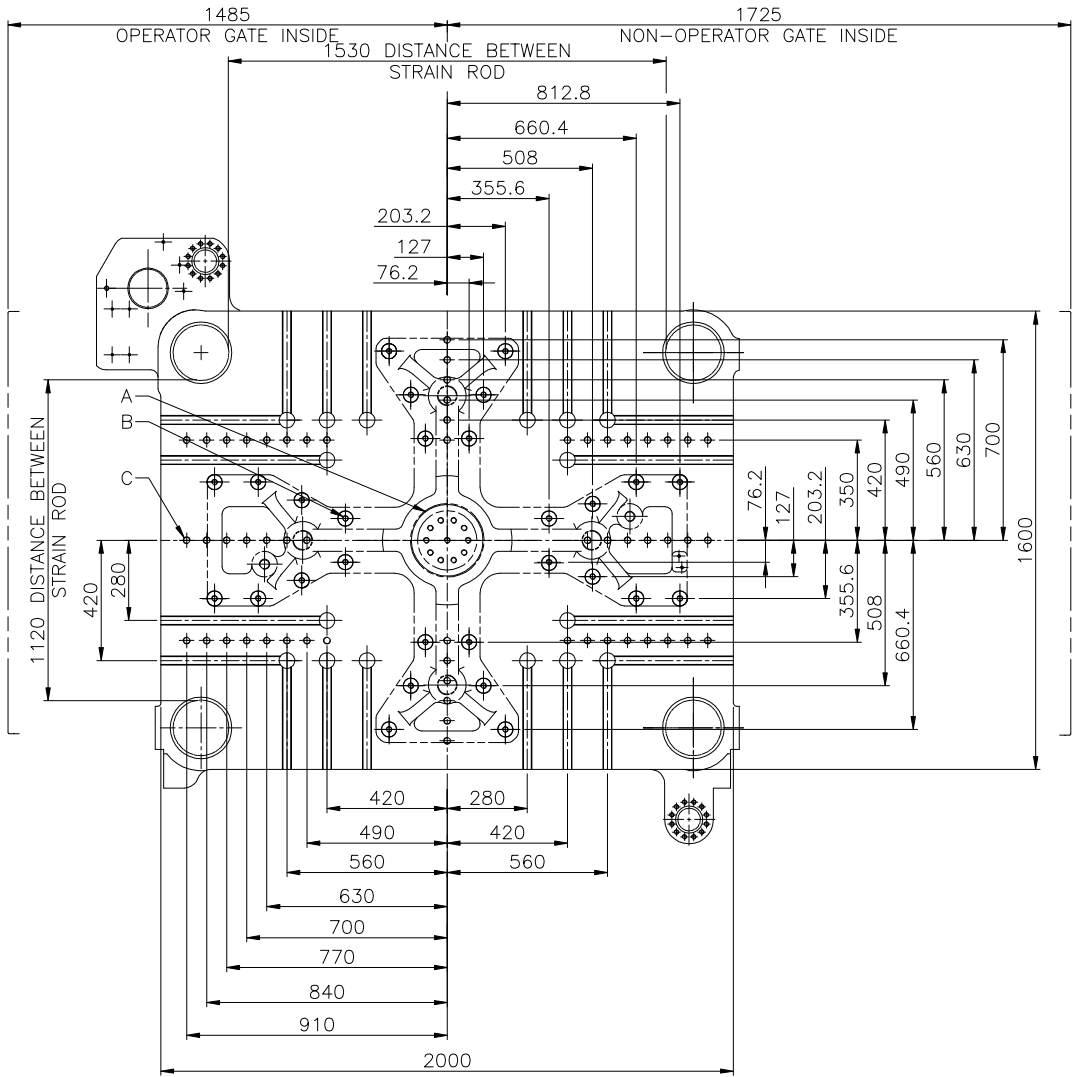

ALL DIMENSIONS ARE IN MM

- A MOVING PLATEN: Ø250 H8 THRU BORE
STATIONARY PLATEN:
Ø250(+0.072/0.00) WITH LOCATING RING
Ø315 H7(+0.052/0.00) WITHOUT LOCATING RING
- B Ø52.40 THRU, (28) HOLES & K/O BAR SIDE HOLES M20x50 DEEP (28) NOS.
K/O BAR CENTER HOLE M20x50 DEEP
- C M24x60 DEEP (58) HOLES

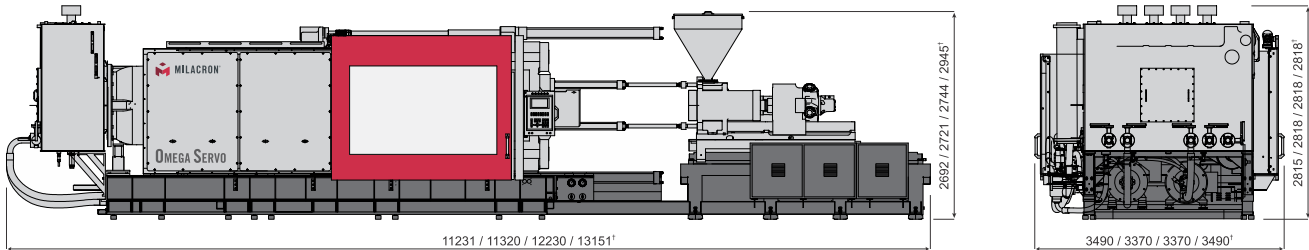

OMEGA SERVO 910

INTERNATIONAL SIZE		9100-4850			9100-6440		9100-7290	9100-10070	
POWER PACK *		54.4 kW							
	UNIT	90 MM FRAME			100 MM FRAME			110 MM FRAME	
	METRIC	A	B	C	A	B	C	A	B
INJECTION UNIT SPECIFICATIONS									
INJECTION CAPACITY MAX. (GPPS)	gms	2421	2989	3617	3288	3978	5137	5063	6538
THEORETICAL DISPLACEMENT	cc	2545	3142	3801	3456	4181	5400	5322	6872
INJECTION PRESSURE MAX.	bar	1906	1544	1276	1864	1540	1350	1891	1465
INJECTION RATE	cc/sec	897	1108	1340	943	1141	1337	784	1012
INJECTION SCREW STROKE	mm	400	400	400	440	440	440	560	560
SCREW DIAMETER	mm	90	100	110	100	110	125	110	125
SCREW L/D RATIO		22.2	20	18.2	22	20	20	22.7	20
SCREW SPEED	rpm	212	191	174	174	174	153	173	153
SCREW TORQUE @ 172 BAR	Nm	6355	6355	6355	7924	7924	7924	7924	7924
PLASTICIZING RATE (STD SCOPE SCREW)	gm/sec	140	160	185	146	177	201	185	201
NO.OF PYROMETERS (BARREL+NOZZLE)		5+1			6+1			6+1	
TOTAL HEAT CAPACITY	kW	54			59.9		62.4	64.7	
CLAMP UNIT SPECIFICATIONS									
CLAMP FORCE	ton	910			910			910	
CLAMP STROKE	mm	1600			1600			1600	
MAXIMUM DAYIGHT	mm	2350			2350			2350	
MINIMUM MOULD HEIGHT	mm	750			750			750	
PLATEN SIZE (H X V)	mm	2000 X 1600			2000 X 1600			2000 X 1600	
DISTANCE BETWEEN TIE ROD	mm	1530 X 1120			1530 X 1120			1530 X 1120	
TIE ROD DIAMETER	mm	190			190			190	
EJECTOR STROKE	mm	210			210			210	
EJECTOR FORCE	ton	18.3			18.3			18.3	
MOULD WEIGHT CAPACITY (STAT. / MOVING)	kg	19045 (6348 / 12697)			19045 (6348 / 12697)			19045 (6348 / 12697)	
GENERAL									
SERVO DRIVE *	kW	54.4			54.4			54.4	
OIL TANK CAPACITY	L	2900			2900			2900	
WATER REQUIREMENT (INLET TEMP. 29°C)	lpm	300			300			300	
CONNECTED LOAD	kW	108.4			114.3		116.8	119.1	
MACHINE DIMENSION (L X W X H)	m	11.90 X 3.88 X 2.90			12.59 X 3.88 X 2.90		12.70 X 3.88 X 2.90	12.81 X 3.88 X 2.90	
MACHINE WEIGHT	kg	59300			60000			61000	



* UNDER SPECIFIED CONDITION

All machine dimensions and specifications are subject to change. Values are for reference only. These values are for standard machine power.

THE OMEGA SERVO
TONNAGE: 910


Injection Unit 90, 100, 110, 13500, 125

TECHNICAL SPECIFICATIONS

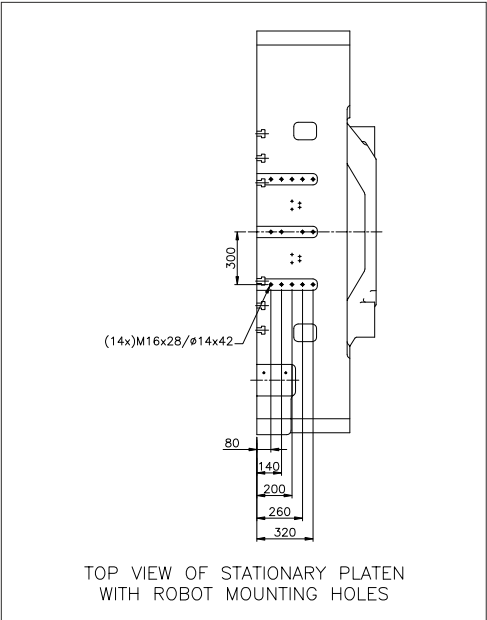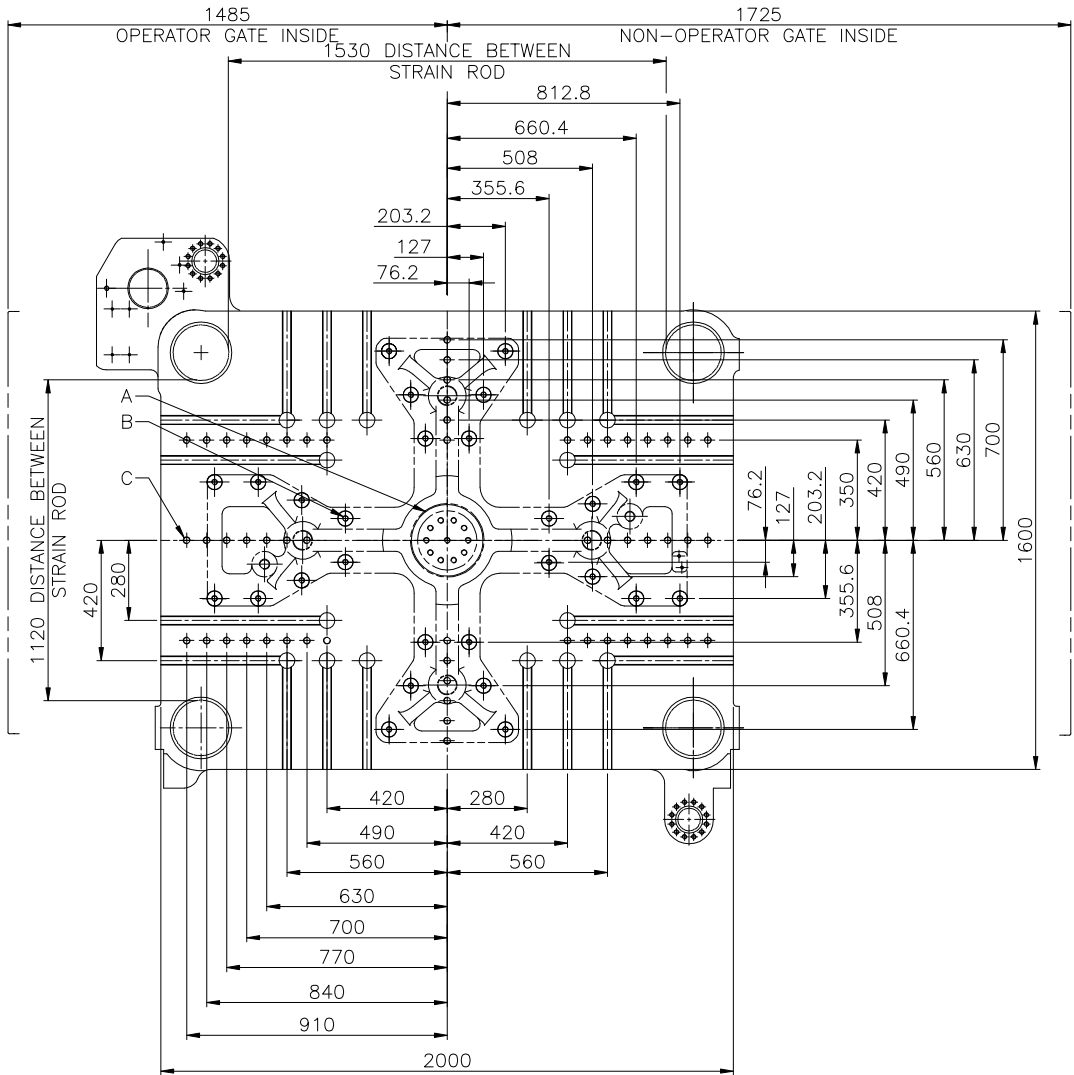

ALL DIMENSIONS ARE IN MM

- A MOVING PLATEN: Ø250 H8 THRU BORE
STATIONARY PLATEN:
Ø250(+0.072/0.00) WITH LOCATING RING
Ø315 H7(+0.052/0.00) WITHOUT LOCATING RING
- B Ø52.40 THRU, (28) HOLES & K/O BAR SIDE HOLES M20x50 DEEP (28) NOS.
K/O BAR CENTER HOLE M20x50 DEEP
- C M24x60 DEEP (58) HOLES

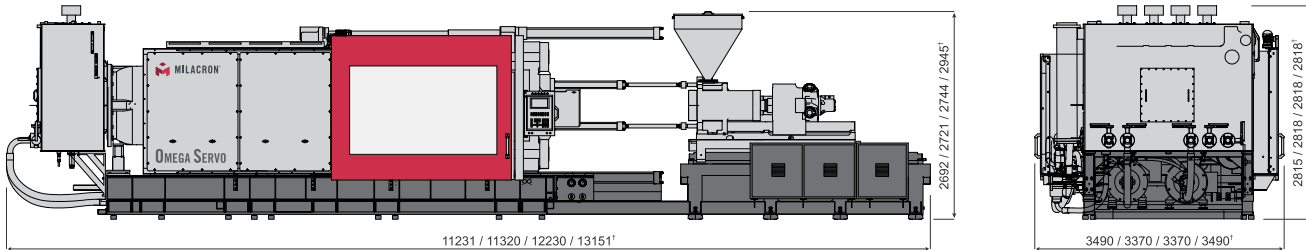


1U 90 / 100 / 110 / 13500

OMEGA SERVO 910


INTERNATIONAL SIZE		9100-13500		9100-13500		9100-16000	
POWER PACK *		54.4 kW		68 kW		68 kW	
	UNIT	13500		13500		125 MM FRAME	
	METRIC	A	B	A	B	A	B
INJECTION UNIT SPECIFICATIONS							
INJECTION CAPACITY MAX. (GPPS)	gms	7112	8295	7112	8295	8174	10253
THEORETICAL DISPLACEMENT	cc	7486	8731	7486	8731	8590	10775
INJECTION PRESSURE MAX.	bar	1798	1542	1798	1542	1890	1510
INJECTION RATE	cc/sec	891	1039	1114	1299	978	1227
INJECTION SCREW STROKE	mm	610	610	610	610	700	700
SCREW DIAMETER	mm	125	135	125	135	125	140
SCREW L/D RATIO		21.6	20	21.6	20	22.4	20
SCREW SPEED	rpm	132	132	140	140	100	100
SCREW TORQUE @ 172 BAR	Nm	10972	10972	10972	10972	13657	13657
PLASTICIZING RATE (STD SCOPE SCREW)	gm/sec	173	218	192	232	142	184
NO.OF PYROMETERS (BARREL+NOZZLE)		6+1		6+1		6+1	
TOTAL HEAT CAPACITY	kW	65		65		65	
CLAMP UNIT SPECIFICATIONS							
CLAMP FORCE	ton	910		910		910	
CLAMP STROKE	mm	1600		1600		1600	
MAXIMUM DAYIGHT	mm	2350		2350		2350	
MINIMUM MOULD HEIGHT	mm	750		750		750	
PLATEN SIZE (H X V)	mm	2000 X 1600		2000 X 1600		2000 X 1600	
DISTANCE BETWEEN TIE ROD	mm	1530 X 1120		1530 X 1120		1530 X 1120	
TIE ROD DIAMETER	mm	190		190		190	
EJECTOR STROKE	mm	210		210		210	
EJECTOR FORCE	ton	18.3		18.3		18.3	
MOULD WEIGHT CAPACITY (STAT. / MOVING)	kg	19045 (6348 / 12697)		19045 (6348 / 12697)		19045 (6348 / 12697)	
GENERAL							
SERVO DRIVE *	kW	54.4		68		68	
OIL TANK CAPACITY	L	2900		3260		3260	
WATER REQUIREMENT (INLET TEMP. 29°C)	lpm	300		310		310	
CONNECTED LOAD	kW	119.4		133		133	
MACHINE DIMENSION (L X W X H)	m	13.30 X 3.88 X 3.03		13.30 x 3.88 x 3.03		13.80 X 3.88 X 2.90	
MACHINE WEIGHT	kg	63500		64000		65500	

* UNDER SPECIFIED CONDITION

All machine dimensions and specifications are subject to change. Values are for reference only. These values are for standard machine power.

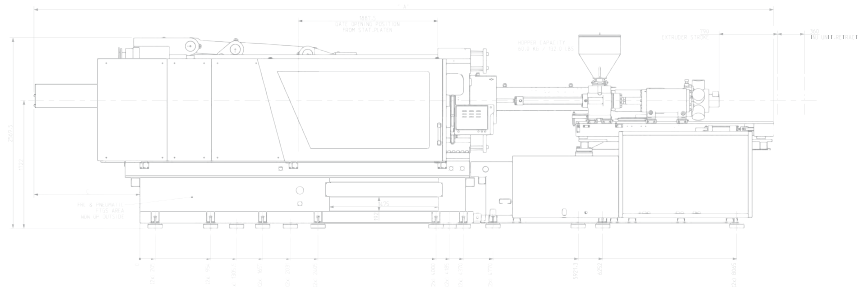

All specifications reflect average values based on typical machine layouts. Actual figures will vary depending on final machine configuration. Performance specifications are based on theoretical data. Photograph may show attachments or accessories, which may not be part of the standard scope of supply. Due to continual improvements, specifications & some components are subject to change without notice.

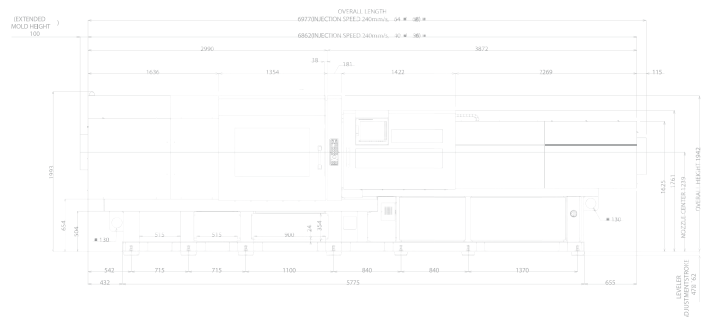

OFFICE	PHONE NUMBER
BENGALURU	+91 99169 51333
PANCHKULA	+91-172-415 5955
CHENNAI	+91-44-2378 3648/0456/3318
HYDERABAD	+91-40-4539 2595
KOLKATA	+91-33-4601 7768
MUMBAI	+91-22-4005 5459/65
NEW DELHI	+91-11-4630 1114/5/6
PUNE	+91-20-4861 5001/02
VAPI	+91-75674 11133



Milacron India Pvt. Ltd.
93/2 & 94/1, Phase-I, G.I.D.C. Vatva,
Ahmedabad - 382445, Gujarat, India.

+91-79-61341700
enquiry@milacron.com
www.milacron.com

